

**REQUEST FOR PROPOSAL
PROJECT NO. FL1103-SITE 110**

Page 1 of 6

Cass County is requesting bids for excavating, placing fabric, riprap and flowable fill and backfilling behind the west abutment of Bridge No. 127-30.0 located on the north line of Section 5-138-51 (Addison Township) over the Maple River. Location is in Durbin on 42nd St. SE. Bid shall include all materials, labor, equipment, insurance, mobilization, and any other costs associated with the repair and incidental items. All work shall be completed as outlined, and shall conform to applicable sections of the current edition of the NDDOT Standard Specifications for Road and Bridge Construction, and Supplemental Specifications currently in force.

Sealed bids will be received until 10:00 am on May 24, 2012 by the Cass County Auditor at the Auditor's Office in the Cass County Courthouse, 211 9th Street South, Fargo, North Dakota, 58103. Bids will be opened immediately following the hour set for receiving bids. Envelope containing the completed Bid Schedule (Sheets 5 & 6 of 6) shall be marked "Bid for Durbin Bridge Repair". Payment, performance, and bid bonds are not required.

NOT FOR BIDDING PURPOSES

CONSTRUCTION NOTES

Page 2 of 6

Completion date for this project shall be August 31, 2012.

Bridge No. 127-30.0 consists of a three span bridge with a timber deck, steel beams, timber piers and concrete abutments.

The scope of this project shall include excavating and salvaging fill at the west abutment, excavating a 4' x 4' trench at the base, placing S1 Geotextile Fabric, rock riprap, and flowable fill in the trench and placing fill in 1 foot lifts and compacting with tamping equipment. Class 5 aggregate shall be placed & compacted over the fill.

The Contractor's attention is drawn to Section 102.06 of the Standard Specifications. Contractor shall be responsible for field verification of types and sizes of materials required to complete this work.

The cost of incidental items required, but not listed in the estimate of quantities, shall be included in the price bid.

The Contractor shall be responsible for locating any utilities on site. Any work affecting utility cables shall be coordinated with the appropriate company. Repair of any damage to utilities shall be at the Contractor's expense.

Traffic Control shall be by others.

Erosion Control shall be included in the Foundation Preparation Bid Item.

Current Davis-Bacon labor wage rates shall apply.

Excavation at the west abutment to be approximately 12' deep x 24' wide with a 4' bench at the base and an excavated slope of 2 to 1. Place and compact select backfill (Class 5) in 12" lifts along the abutment (approx. 2' wide) and place and compact the salvaged fill outside the select backfill.

Class 2 Excavation shall be a 4' wide x 4' deep x 24' long trench along the bottom of the west abutment. The top of the trench shall be 1' above the bottom of the abutment.

Treated Timber Rail includes hardware to attach to timber posts.


Mitigation shall include the trench, Geotextile Fabric (Propex NW-601 non-woven or approved equal) placed in the trench on the 4 sides and lapped and embedded, rock riprap placed inside the fabric and flowable fill placed in the voids of the riprap.

Emergency Relief Contract Requirements: All items listed on the “Emergency Relief Contract Requirements” attachment will apply for this project. This form will not need to be completed prior to proposal submittal. Detailed information for this is not attached to this RFP, but is available at the Cass County Highway Department or the following website.


<http://www.dot.nd.gov/divisions/localgov/docs/ddir/ContractRequirementsChecklistAndDocumentsLongVersion.pdf>

NOT FOR BIDDING PURPOSES

**CASS COUNTY HIGHWAY DEPARTMENT
 COUNTY PROJECT NUMBER FL1103 - FLOOD SITE 110
 SECTION 5 ADDISON/SECTION 32 DURBIN TOWNSHIPS**

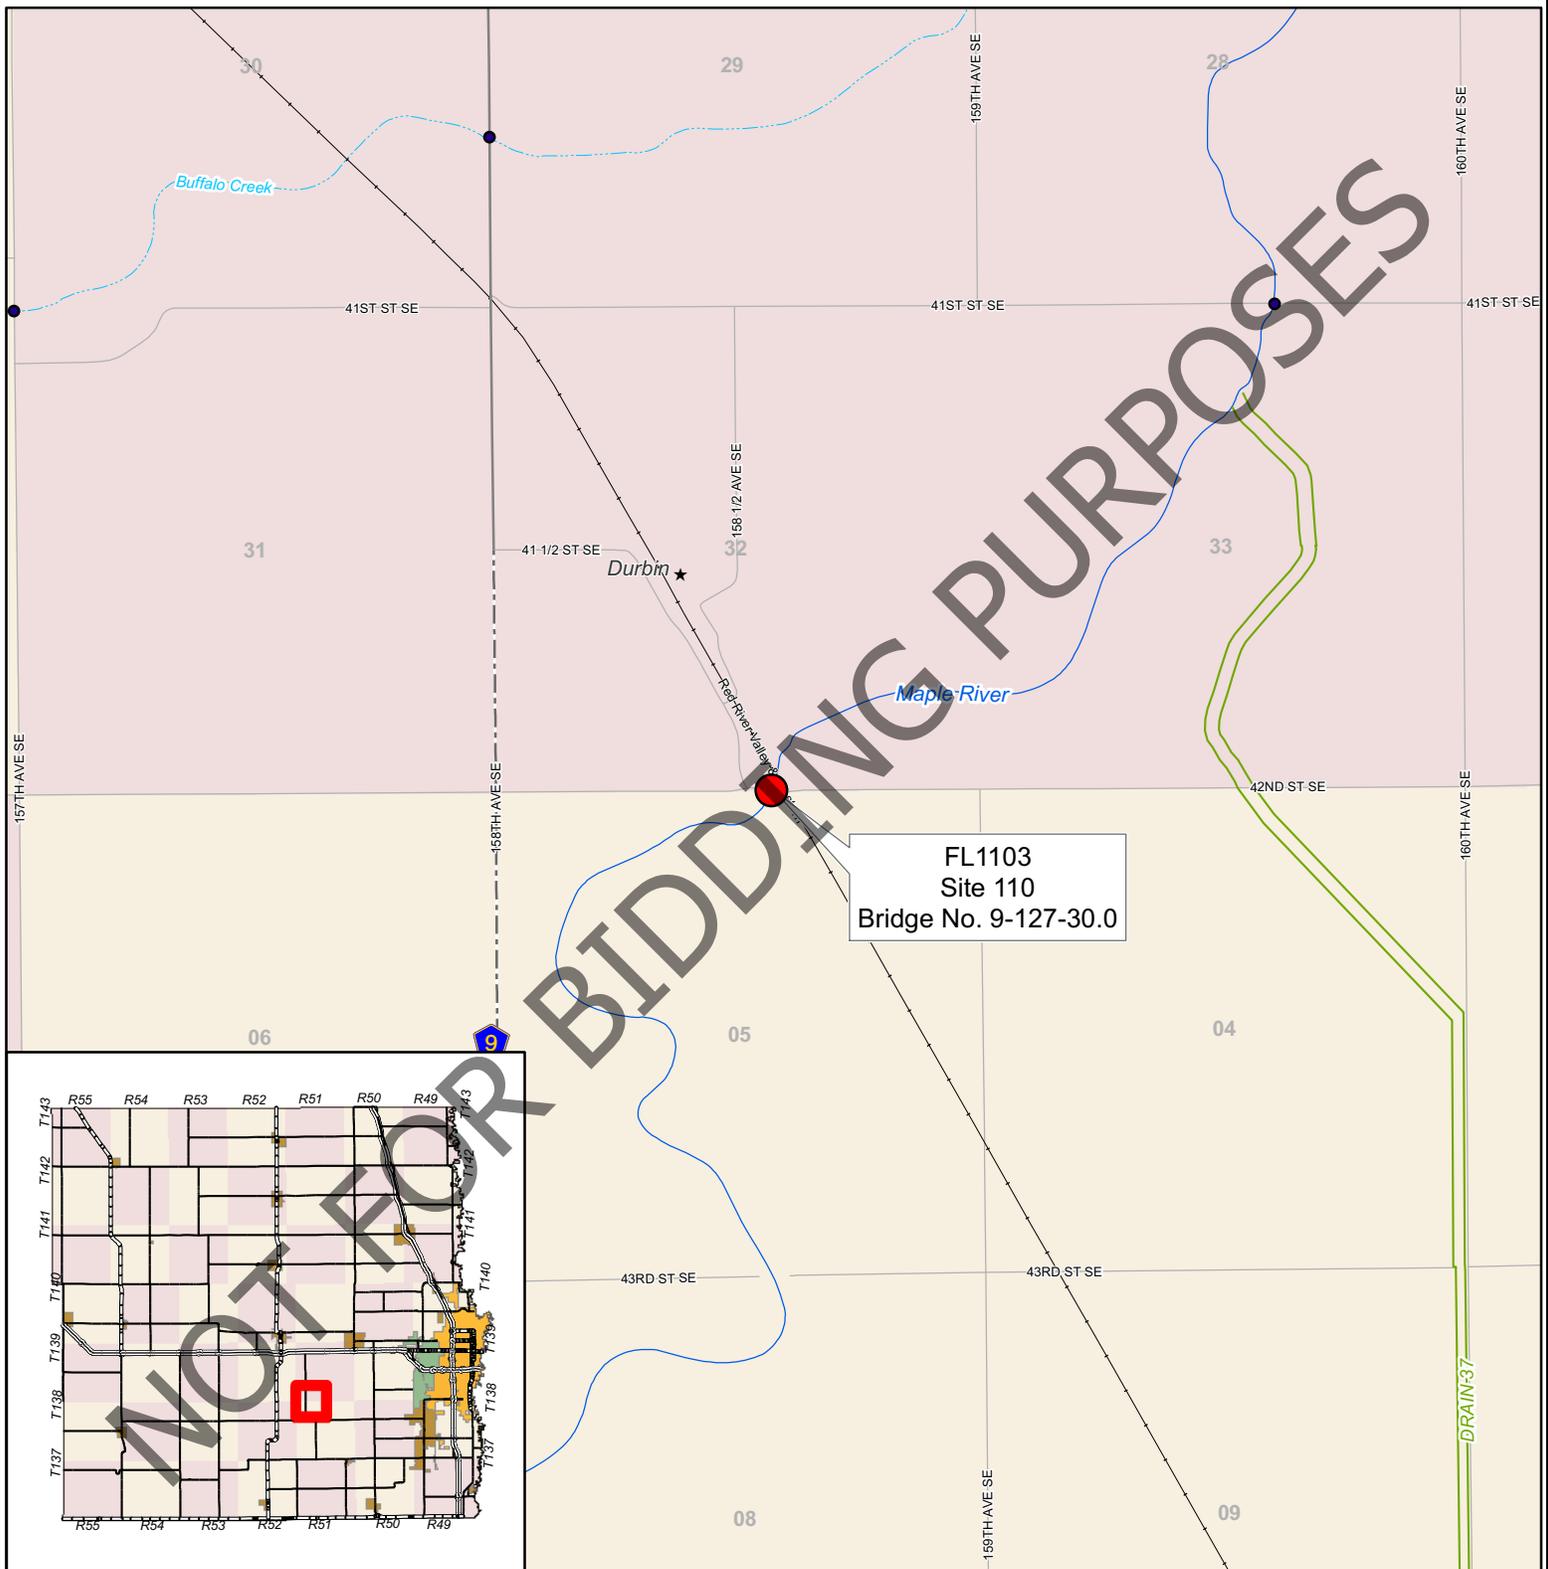

FL1103
 Site 110
 Bridge No. 9-127-30.0

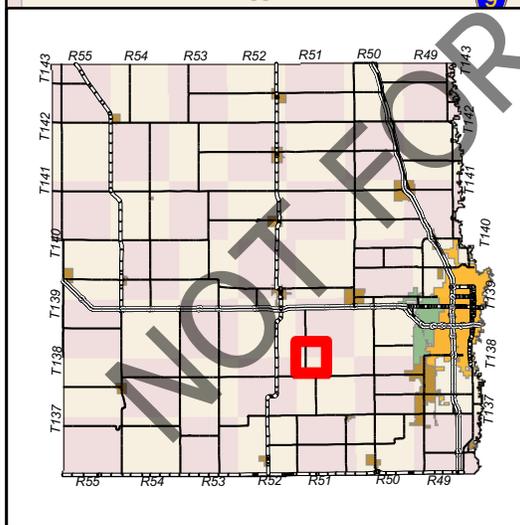

**CASS COUNTY
 GOVERNMENT**




Prepared by
 Cass County Highway Dept.
 May 2012

-  Flood Sites
-  City Limits
-  FARGO
-  WEST FARGO

-  Drain/Coulee/Ditch
-  Perennial Stream
-  Intermittent Stream

-  Interstates
-  US Routes
-  State
-  County

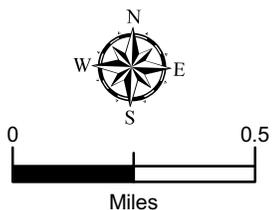

CASS COUNTY HIGHWAY DEPARTMENT
BID SCHEDULE - BRIDGE NO. 127-30.0 REPAIR
SECTION 5 ADDISON/32 DURBIN TOWNSHIPS

BIDDER MUST TYPE OR NEATLY PRINT UNIT PRICES IN NUMERALS,
 MAKE EXTENSIONS FOR EACH ITEM, AND TOTAL, DO NOT CARRY
 UNIT PRICES FURTHER THAN THREE(3) DECIMAL PLACES.

Spec. No.	Item No.	Description	Unit & Approx. Quant.	Unit Price		Amount	
				\$\$\$\$	000	\$\$\$\$	000
210	001	Excavate, Salvage and Recompact Fill (Approx. 170 CY)	LS 1				
210	002	Class 2 Excavation (Approx. 14 CY)	LS 1				
210	003	Select Backfill – Class 5	CY 18				
210	004	Foundation Preparation	EA 1				
210	005	Flowable Fill	CY 4				
302	006	Aggregate Surface Course Class 5	CY 26				
618	007	3"x 4" x 7' Treated Timber Rail	EA 1				
702	008	Mobilization	LS 1				
708	009	Riprap- Loose Rock	CY 14				
709	010	Geotextile Fabric – Type S1	SY 52				
754	011	Hazard Marker – Type III	EA 2				

TOTAL SUM BID = _____

NAME OF FIRM _____

AUTHORIZED SIGNATURE _____

TITLE _____

DATE _____

NOT FOR BIDDING PURPOSES

Emergency Relief Contract Requirements

Project Number:

ER Site:

Location:

Year:

The Contractor shall perform all work in accordance with the *North Dakota Department of Transportation Standard Specifications for Road and Bridge Construction* and the most current *Supplemental Specifications*. The Contractor's signature and initials below indicated he has received or will obtain via the provided links and will abide by the policies and regulations of each of the following:

_____ FHWA 1273 – Required Contract Provisions

_____ NDDOT ADA Requirements

_____ NDDOT Revision to Race-Neutral DBE Special Provision

_____ NDDOT Special Provision – DBE Race-Neutral (with revision)
www.dot.nd.gov/divisions/civilrights/dbeprogram.htm

_____ EEO Affirmative Action Requirements
www.dot.nd.gov/divisions/civilrights/docs/affirmativeactionrequirements.pdf

_____ Prompt Payment – 46 CFR 26.29
www.dot.nd.gov/divisions/civilrights/docs/dbepromptpay20080118.pdf

_____ Davis-Bacon Wage and Payroll Requirements
www.dot.nd.gov/divisions/civilrights/laborcompliance.htm

_____ Buy America Provision
<http://www.fhwa.dot.gov/construction/cqit/buyam.cfm>

_____ Convict Produced Material/ Convict Labor Provision
<http://www.fhwa.dot.gov/construction/cqit/convict.cfm>

_____ All materials shall come from an approved location. Pre-approved locations can be found on the NDDOT website at:
www.dot.nd.gov/dotnet2/materialsource/certificatesofapproval.aspx

For new locations the contractor shall complete and submit SFN 58466 -
MATERIAL SOURCE APPROVAL REQUEST

NDDOT or LPA witness

Date

Contractor Representative

Date