

**REQUEST FOR PROPOSAL
PROJECT NO. FL1103-SITE 129**

Page 1 of 6

Cass County is requesting bids for excavating, placing fabric and backfilling behind the south abutment of Bridge No. 119-26.0 located on the west line of Section 7-139-52 (Everest Township) over a tributary of the Maple River. Location is approximately 4 miles west and 1 mile south of Casselton on 151st Ave. SE. Bid shall include all materials, labor, equipment, insurance, mobilization, and any other costs associated with the repair and incidental items. All work shall be completed as outlined, and shall conform to applicable sections of the current edition of the NDDOT Standard Specifications for Road and Bridge Construction, and Supplemental Specifications currently in force.

Sealed bids will be received until 10:00 am on July 12, 2012 by the Cass County Auditor at the Auditor's Office in the Cass County Courthouse, 211 9th Street South, Fargo, North Dakota, 58103. Bids will be opened immediately following the hour set for receiving bids. Envelope containing the completed Bid Schedule (Pages 5 & 6 of 6) shall be marked "Bid for Everest Bridge Repair". Payment, performance, and bid bonds are not required.

CONSTRUCTION NOTES

Page 2 of 6

Completion date for this project shall be October 31, 2012.

Bridge No. 119-26.0 consists of a single span bridge with a timber laminated deck, timber abutments and timber piling.

The scope of this project shall include excavating & salvaging fill at the south abutment, placing R1 Geotextile Fabric against the abutment and 4 feet horizontally at the bottom of the excavation and replacing fill in 1 foot lifts and compacting with tamping equipment. Class 5 aggregate shall be placed & compacted over the fill. The area under the bridge deck shall be dewatered, excavated of muck and have S1 Geotextile Fabric and 2 feet of rock riprap placed from abutment to abutment.

The Contractor's attention is drawn to Section 102.06 of the Standard Specifications. Contractor shall be responsible for field verification of types and sizes of materials required to complete this work.

The cost of incidental items required, but not listed in the estimate of quantities, shall be included in the price bid.

The Contractor shall be responsible for locating any utilities on site. Any work affecting utility cables shall be coordinated with the appropriate company. Repair of any damage to utilities shall be at the Contractor's expense.

Traffic Control shall be by others.

Current Davis-Bacon labor wage rates shall apply.

Excavation at the south abutment to be approximately 5' deep x 25' wide with a 4' bench at the base and an excavated slope of 2 to 1. Place and compact select backfill (Class 5) in 12" lifts along the abutment (approx. 1' wide) and place and compact the salvaged fill outside the select backfill and dispose of excess fill material.

Foundation Preparation to include dewatering and erosion control.


Muck Excavation to be approximately 6" deep x 18' long x 35' wide.

Mitigation to include placing Geotextile Fabric (Propex NW-601 non-woven or approved equal) under the bridge between the abutments and placing 2 feet of rock riprap on the fabric.


Emergency Relief Contract Requirements: All items listed on the “Emergency Relief Contract Requirements” attachment will apply for this project. This form will not need to be completed prior to proposal submittal. Detailed information for this is not attached to this RFP, but is available at the Cass County Highway Department or the following website.

http://www.dot.nd.gov/divisions/localgov/docs/d_dir/ContractRequirementsChecklistAndDocumentsLongVersion.pdf


CASS COUNTY HIGHWAY DEPARTMENT COUNTY PROJECT NUMBER FL1103 - FLOOD SITE 129 SECTION 12 GILL TOWNSHIP/SECTION 7 EVEREST TOWNSHIP

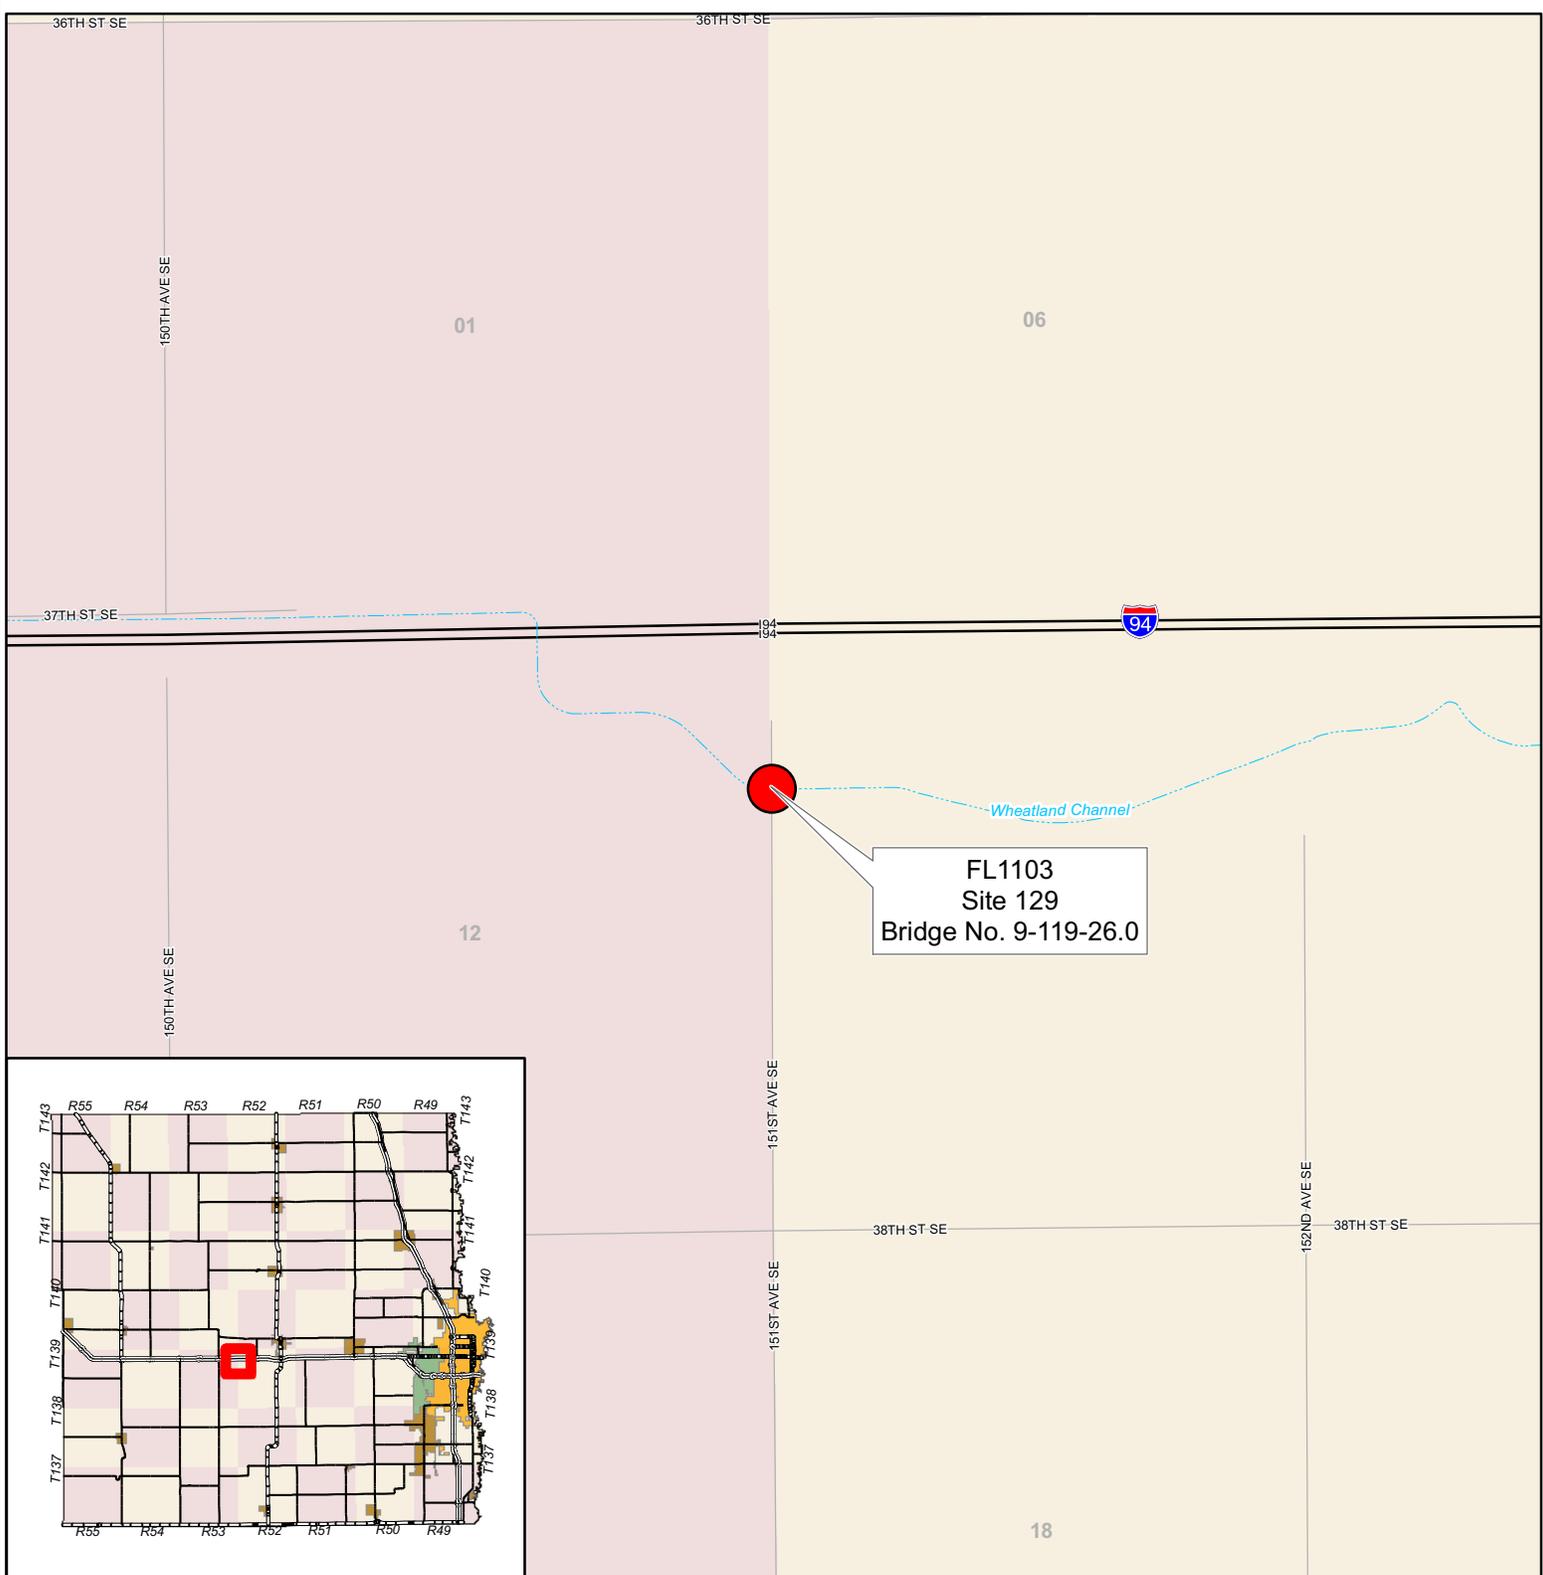

FL1103
Site 129
Bridge No. 9-119-26.0

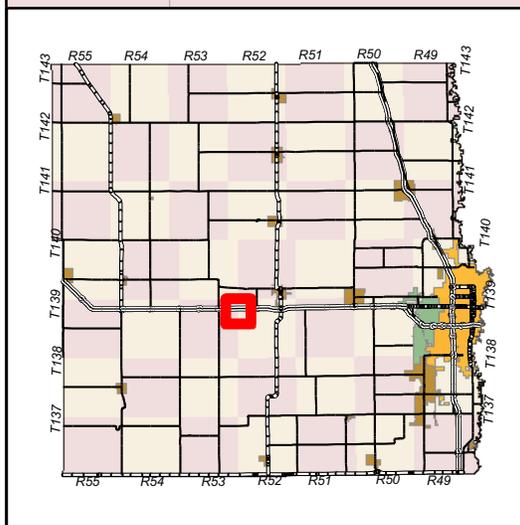

- | | | | | | |
|---|-------------|---|---------------------|---|-------------|
|  | Flood Sites |  | Drain/Coulee/Ditch |  | Interstates |
|  | City Limits |  | Perennial Stream |  | US Routes |
|  | FARGO |  | Intermittent Stream |  | State |
|  | WEST FARGO | | |  | County |



CASS COUNTY HIGHWAY DEPARTMENT

BID SCHEDULE - BRIDGE NO. 119-26.0 REPAIR

SECTION 12 GILL/7 EVEREST TOWNSHIPS

BIDDER MUST TYPE OR NEATLY PRINT UNIT PRICES IN NUMERALS,
MAKE EXTENSIONS FOR EACH ITEM, AND TOTAL, DO NOT CARRY
UNIT PRICES FURTHER THAN THREE(3) DECIMAL PLACES.

Spec. No.	Item No.	Description	Unit & Approx. Quant.	Unit Price		Amount	
				\$\$\$\$	000	\$\$\$\$	000
203	001	Muck Excavation (Approx. 12 CY)	LS 1				
210	002	Excavate, Salvage & Recompact Fill (Approx. 42 CY)	LS 1				
210	003	Select Backfill – Class 5	CY 4				
210	004	Foundation Preparation	EA 1				
302	005	Aggregate Base Course Class 5	CY 5				
302	006	Aggregate Surface Course Class 5	TON 6				
702	007	Mobilization	LS 1				
708	008	Riprap- Loose Rock	CY 47				
709	009	Geotextile Fabric – Type S1	SY 82				
709	010	Geotextile Fabric – Type R1	SY 25				

TOTAL SUM BID = _____

NAME OF FIRM _____

AUTHORIZED SIGNATURE _____

TITLE _____

DATE _____

Emergency Relief Contract Requirements

Project Number:

ER Site:

Location:

Year:

The Contractor shall perform all work in accordance with the *North Dakota Department of Transportation Standard Specifications for Road and Bridge Construction* and the most current *Supplemental Specifications*. The Contractor's signature and initials below indicated he has received or will obtain via the provided links and will abide by the policies and regulations of each of the following:

_____ FHWA 1273 – Required Contract Provisions

_____ NDDOT ADA Requirements

_____ NDDOT Revision to Race-Neutral DBE Special Provision

_____ NDDOT Special Provision – DBE Race-Neutral (with revision)
www.dot.nd.gov/divisions/civilrights/dbeprogram.htm.

_____ EEO Affirmative Action Requirements
www.dot.nd.gov/divisions/civilrights/docs/affirmativeactionrequirements.pdf

_____ Prompt Payment – 46 CFR 26.29
www.dot.nd.gov/divisions/civilrights/docs/dbepromptpay20080118.pdf

_____ Davis-Bacon Wage and Payroll Requirements
www.dot.nd.gov/divisions/civilrights/laborcompliance.htm

_____ Buy America Provision
<http://www.fhwa.dot.gov/construction/cqit/buyam.cfm>

_____ Convict Produced Material/ Convict Labor Provision
<http://www.fhwa.dot.gov/construction/cqit/convict.cfm>

_____ All materials shall come from an approved location. Pre-approved locations can be found on the NDDOT website at:

www.dot.nd.gov/dotnet2/materialsource/certificatesofapproval.aspx

For new locations the contractor shall complete and submit SFN 58466 -
MATERIAL SOURCE APPROVAL REQUEST

NDDOT or LPA witness

Date

Contractor Representative

Date